

Binks Style Cardboard Spray Booth Filter Primary Overspray Filtration

Applications

The Binks Bullows style filter is used in spray booths for removing wet and dry over spray from the air stream.

Description

Constructed from two sheets of heavy paper containing staggered rows of perforations, paint and particulate deposits in the air attach themselves to the filter as they hit the surfaces within before leaving the filter.

Binks Bullows style filter are installed across the width of a spray booth with one end clipped in place and the working section of the filter pulled across the spray booth and secured. Once the filter becomes too dirty to use, it can be cut and removed allowing for a new filter section to be pulled across.


Technical

Maximum Recommended Face Velocity : 0.25 to 1m/s

Clean Pressure Drop : 55Pa at 1m/s

Recommended Max Pressure Drop: 128Pa

Filter Dimensions: 9.2m x 900mm

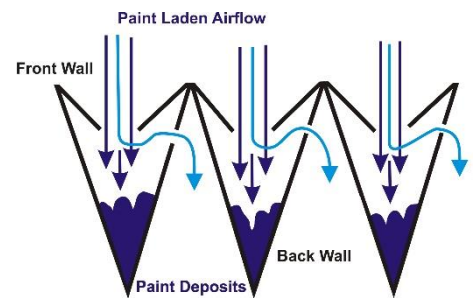

BINKS CARDBOARD SPRAY BOOTH STYLE FILTER (Andrea Pack)

Filter	Size	Part Number
Binks Style Spray Booth Filter	9.2 x 900mm	1710700